




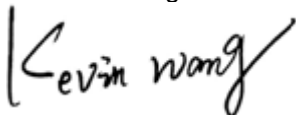
TEST REPORT

Applicant: DIGIVIEW TECHNOLOGY LIMITED
Address of Applicant: Room 509, 5/F, Tian Shu Block, Xinggang Tongchuanghui,
No.6099 Baoan District, Shenzhen, Guangdong, China
Manufacturer/Factory: DIGIVIEW TECHNOLOGY LIMITED
Address of Manufacturer/Factory: Room 509, 5/F, Tian Shu Block, Xinggang Tongchuanghui,
No.6099 Baoan District, Shenzhen, Guangdong, China
Equipment Under Test (EUT)
Product Name: POWER BANK
Brand Name: 
Model No.: DP50DQ-A
Applicable standards: EN 62311:2008
Date of sample receipt: November 28, 2023
Date of Test: November 28, 2023 To December 8, 2023
Date of report issue: December 8, 2023
Test Result : Pass *

* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EU Declaration of Conformity and compliance with all relevant EU Directives.

Authorized Signature



Kevin Wang

Laboratory Manager





2 Version

| Version No. | Date | Description |
|-------------|------------------|-------------|
| 00 | December 8, 2023 | Original |
| | | |
| | | |
| | | |
| | | |

Prepared By:

Gary Wang

Date:

December 8, 2023

Project Engineer

Reviewed By:

Kevin Wang

Date:

December 8, 2023

Reviewer





3 Contents

| | Page |
|--|------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 CONTENTS | 3 |
| 4 GENERAL INFORMATION | 4 |
| 4.1 GENERAL DESCRIPTION OF EUT | 4 |
| 4.2 DESCRIPTION OF SUPPORT UNITS | 4 |
| 4.3 DEVIATION FROM STANDARDS | 4 |
| 4.4 ABNORMALITIES FROM STANDARD CONDITIONS | 4 |
| 4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 4 |
| 5 APPLICABILITY OF COMPLIANCE ASSESSMENT METHODS | 5 |
| 5.1 E.U.T. OPERATION | 6 |
| 5.2 MEASUREMENT DATA | 6 |

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



4 General Information

4.1 General Description of EUT

| | |
|----------------------|--|
| Product Name: | POWER BANK |
| Model No.: | DP50DQ-A |
| Operation Frequency: | 100-300kHz |
| Modulation type: | ASK |
| Antenna Type: | Coil Antenna |
| Antenna Gain: | 0dBi |
| Power Supply: | USB-C Input: 5V $\overline{\text{---}}$ 2.4A Battery: 3.7V, 5000mAh, 18.5Wh USB-C Output: 5V --- 2.4A USB-A Output: 5V --- 2.4A USB-A & USB-C Output: 5V $\overline{\text{---}}$ 2.4A Wireless output: 5W |

4.2 Description of Support Units

| |
|-------|
| None. |
|-------|

4.3 Deviation from Standards

| |
|-------|
| None. |
|-------|

4.4 Abnormalities from Standard Conditions

| |
|-------|
| None. |
|-------|


4.5 Other Information Requested by the Customer

| |
|-------|
| None. |
|-------|

5 Applicability of compliance assessment methods

EN 62311 Generic standard to demonstrate the compliance of electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic fields (0 Hz–300 GHz) is to demonstrate the compliance of apparatus with the basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields as well as induced and contact current.

Assessment flowchart:

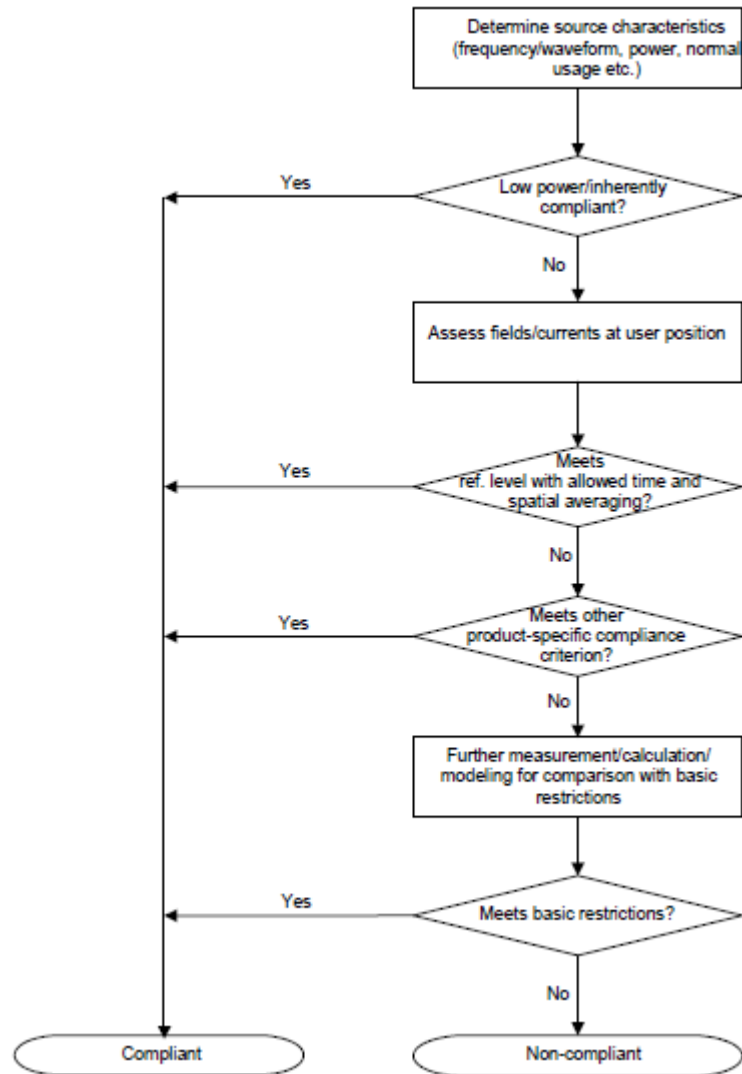

5.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C

Humidity: 52% RH

Atmospheric Pressure: 1015 mbar

Measurement Distance: 0cm

5.2 Measurement Data

Magnetic Field Emissions

| Test Position | Test Distance (cm) | Probe Measure Result (A/m) | Limit (A/m) |
|---------------|-----------------------|-------------------------------|----------------|
| A | 0 | 0.211 | 5 |
| B | 0 | 0.164 | 5 |
| C | 0 | 0.224 | 5 |
| D | 0 | 0.169 | 5 |
| E | 0 | 0.173 | 5 |

Position E: top of EUT


Position B: near of EUT

Position C: rear of EUT

Position D: left of EUT

Position A: right of EUT

Position F: Bottom of EUT (As bottom point is not required to test for desktop devices)



-----End-----